



Silicon Planar Zener Diodes: BZT52BxxxSAU Series

Rev.1.1

FEATURE

- ◇ Total power dissipation : max 200mW.
- ◇ Small plastic package suitable for surface mounted design.
- ◇ High reliability.
- ◇ AEC-Q101 qualified.



SOD-323

DESCRIPTION

- ◇ Silicon planar zener diode in a small plastic.
- ◇ SMD SOD-323 package.




Symbol

ABSOLUTE MAXIMUM RATINGS AND THERMAL CHARACTERISTICS

Parameter	Symbol	Max Value	Unit
Total power dissipation @ $T_A=25^\circ\text{C}$	P_D	200	mW
Thermal resistance junction to ambient	$R_{\theta JA}$	625	$^\circ\text{C/W}$
Junction temperature range	T_J	-55 to+150	$^\circ\text{C}$
Storage temperature range	T_S	-55 to+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$)

Symbol	Parameter
V_Z	Reverse zener voltage at I_{ZT}
I_{ZT}	Reverse current
Z_{ZT}	Maximum zener impedance at I_{ZT}
I_R	Reverse leakage current at V_R
V_R	Reverse voltage
I_F	Forward current
V_F	Forward voltage at I_F

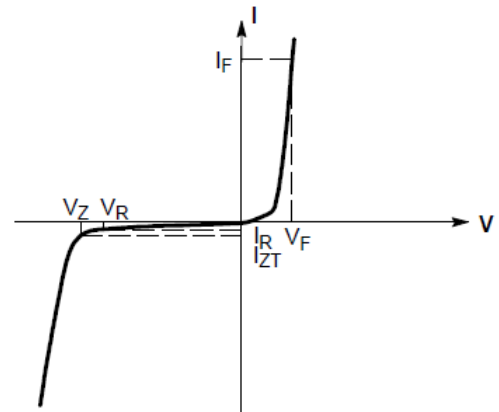

Zener voltage regulator

MARKING



2W7: Device Marking Code

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)Maximum $V_F=0.9\text{V}$ at $I_F=10\text{mA}$


Type number	Zener voltage range at $I_{ZT}^{1)}$				Maximum zener impedance			Maximum reverse leakage current		Marking
	Nom (Volts)	Min (Volts)	Max (Volts)	I_{ZT} (mA)	Z_{ZT} (Ω)	Z_{ZK} (Ω)	I_{ZK} (mA)	I_R (μA)	V_R (Volts)	
BZT52B4V7SAU	4.70	4.61	4.79	5.0	80	500	1.0	3	2.0	2W7
BZT52B5V1SAU	5.10	5.00	5.20	5.0	60	480	1.0	2	2.0	2W8
BZT52B5V6SAU	5.60	5.49	5.71	5.0	40	400	1.0	1	2.0	2W9
BZT52B6V2SAU	6.20	6.08	6.32	5.0	10	150	1.0	3	4.0	2WA
BZT52B6V8SAU	6.80	6.66	6.94	5.0	15	80	1.0	2	4.0	2WB
BZT52B7V5SAU	7.50	7.35	7.65	5.0	15	80	1.0	1	5.0	2WC
BZT52B8V2SAU	8.20	8.04	8.36	5.0	15	80	1.0	0.7	5.0	2WD
BZT52B9V1SAU	9.10	8.92	9.28	5.0	15	100	1.0	0.5	6.0	2WE
BZT52B10SAU	10.00	9.80	10.20	5.0	20	150	1.0	0.2	7.0	2WF
BZT52B11SAU	11.00	10.78	11.22	5.0	20	150	1.0	0.1	8.0	2WG
BZT52B12SAU	12.00	11.76	12.24	5.0	25	150	1.0	0.1	8.0	2WH
BZT52B13SAU	13.00	12.74	13.26	5.0	30	170	1.0	0.1	8.0	2WI
BZT52B15SAU	15.00	14.70	15.30	5.0	30	200	1.0	0.1	10.5	2WJ
BZT52B16SAU	16.00	15.68	16.32	5.0	40	200	1.0	0.1	11.2	2WK
BZT52B18SAU	18.00	17.64	18.36	5.0	45	225	1.0	0.1	12.6	2WL
BZT52B20SAU	20.00	19.60	20.40	5.0	55	225	1.0	0.1	14.0	2WM
BZT52B22SAU	22.00	21.56	22.44	5.0	55	250	1.0	0.1	15.4	2WN
BZT52B24SAU	24.00	23.52	24.48	5.0	70	250	1.0	0.1	16.8	2WO
BZT52B27SAU	27.00	26.46	27.54	2.0	80	300	0.5	0.1	18.9	2WP
BZT52B30SAU	30.00	29.40	30.60	2.0	80	300	0.5	0.1	21.0	2WQ
BZT52B33SAU	33.00	32.34	33.66	2.0	80	325	0.5	0.1	23.1	2WR
BZT52B36SAU	36.00	35.28	36.72	2.0	90	350	0.5	0.1	25.2	2WS
BZT52B39SAU	39.00	38.22	39.78	2.0	130	350	0.5	0.1	27.3	2WT
BZT52B43SAU	43.00	42.14	43.86	2.0	100	700	1.0	0.1	32.0	2WU

1) V_Z is tested with pulses(10ms)

ORDERING INFORMATION

BZT	52	B	4V7	S	AU
Zener Diode Series	P _D :200mW		Voltage:4.7V		For AEC-Q101 qualified
B:2% Vz Voltage Tolerance				Package:SOD-323	


PACKAGE MECHANICAL DATA

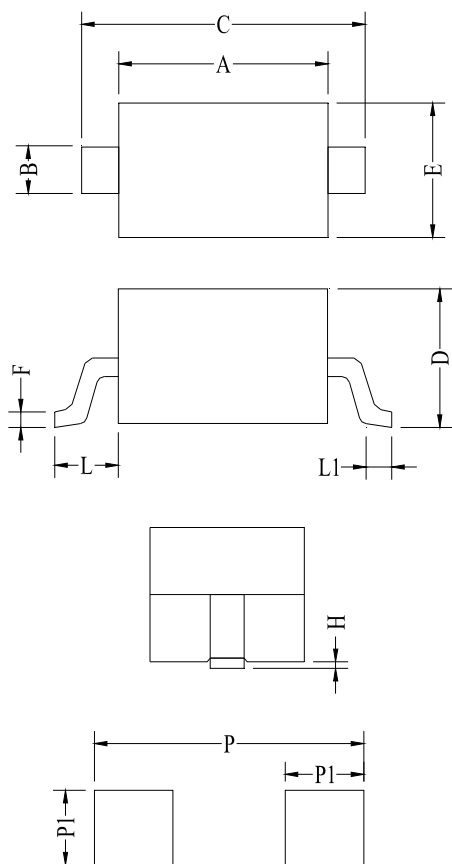

Land Pattern

Symbol	Millimeters			Inches		
	Min	Typ	Max	Min	Typ	Max
A	1.60	1.70	1.80	0.063	0.067	0.071
B	0.25	0.32	0.40	0.010	0.013	0.016
C	2.30	2.60	2.80	0.091	0.102	0.110
D	0.80	0.95	1.10	0.031	0.037	0.043
E	1.20	1.30	1.40	0.047	0.051	0.055
F	0.08	0.13	0.18	0.003	0.005	0.007
L	0.475REF			0.019REF		
L1	0.25	0.33	0.40	0.010	0.013	0.016
H	0.00	0.06	0.14	0.000	0.002	0.006
P	3.00			0.118		
P1	0.80			0.031		

TAPE AND REEL INFORMATION-SOD-323

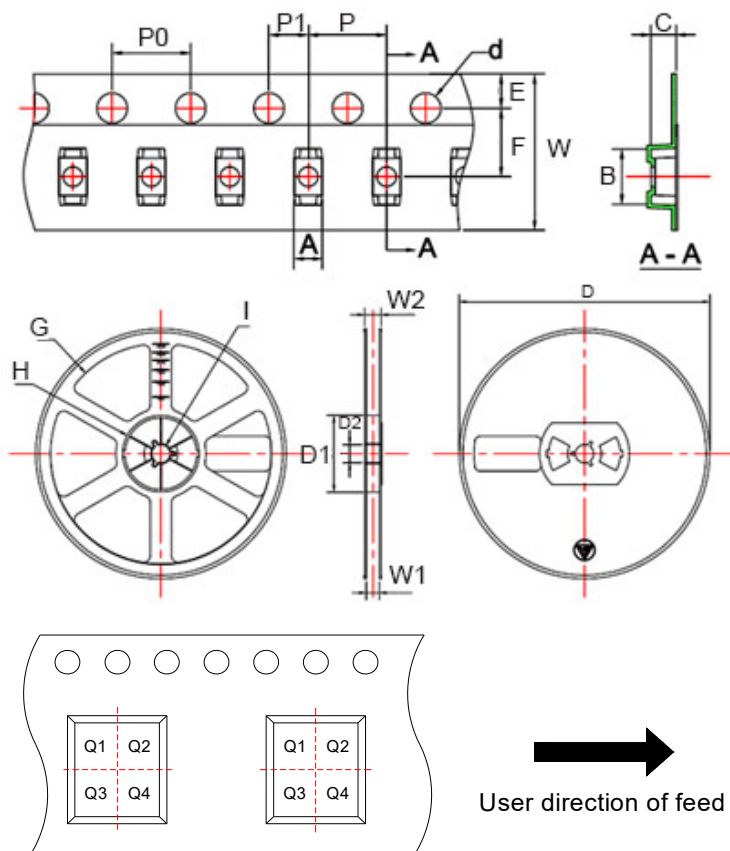

Pin 1 quadrant:Q1&Q2

Packaging description:

SOD-323 parts are shipped in tape. The carrier tape is made from a dissipative(carbon filled) polycarbonate resin. The cover tape is a multilayer film(heat activated adhesive in nature)primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. The reels are blue in color and made of recyclable plastic.

Symbol	Millimeters	Inches
	Typ	Typ
A	1.46	0.057
B	2.90	0.114
C	1.25	0.049
d	ø1.50	ø0.059
E	1.75	0.069
F	3.50	0.138
P0	4.00	0.157
P	4.00	0.157
P1	2.00	0.079
W	8.00	0.315
D	ø178.0	ø7.008
D1	54.40	2.142
D2	13.00	0.512
G	R78.0	R3.071
H	R25.60	R1.008
I	R6.50	R0.256
W1	9.50	0.374
W2	12.30	0.484

ORDERING INFORMATION

Part No.	Package	Reel Size	Quantity Per Reel
BZT52BxxxSAU	SOD-323	7 Inch	3,000 pcs

RATINGS AND CHARACTERISTICS CURVES ($T_A=25^{\circ}\text{C}$, unless otherwise noted)

Fig.1 Power dissipation vs ambient temperature

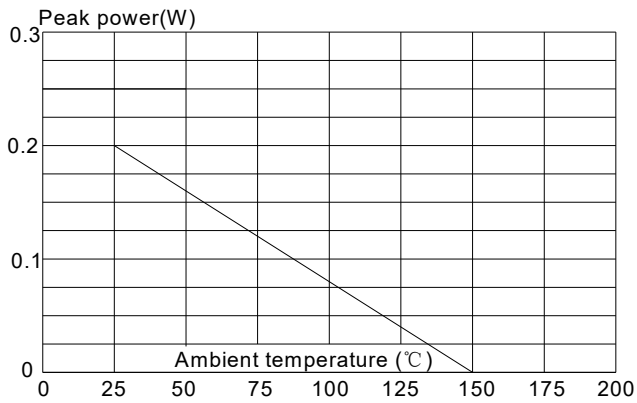


Fig.2 Zener breakdown characteristics

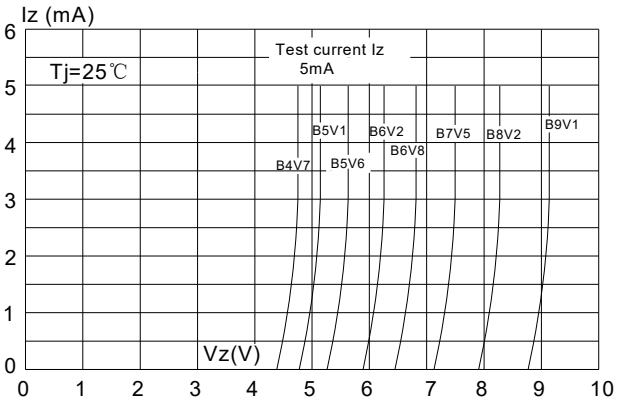


Fig.3 Zener breakdown characteristics


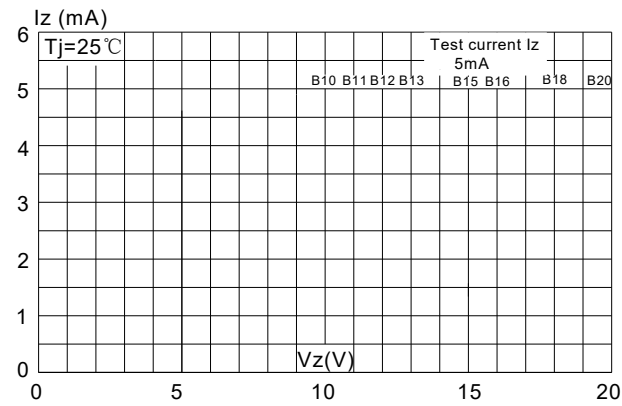


Fig.4 Zener breakdown characteristics

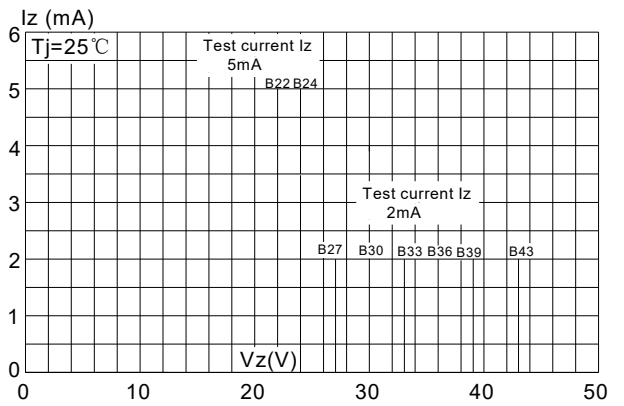


JieJie products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable JieJie product documentation. Warranties granted by JieJie shall be deemed void for products used for any purpose not expressly set forth in applicable JieJie documentation. JieJie shall not be liable for any claims or damages arising out of products used in applications not expressly intended by JieJie as set forth in applicable JieJie documentation. The sale and use of JieJie products is subject to JieJie terms and conditions of sale, unless otherwise agreed by JieJie.

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 1.1st version which is made in 16-Jan.-2026. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright ©2026 Jiangsu JieJie Microelectronics Co., Ltd. Printed All rights reserved.